


Design Status of Bikeway Projects

12 April 2018

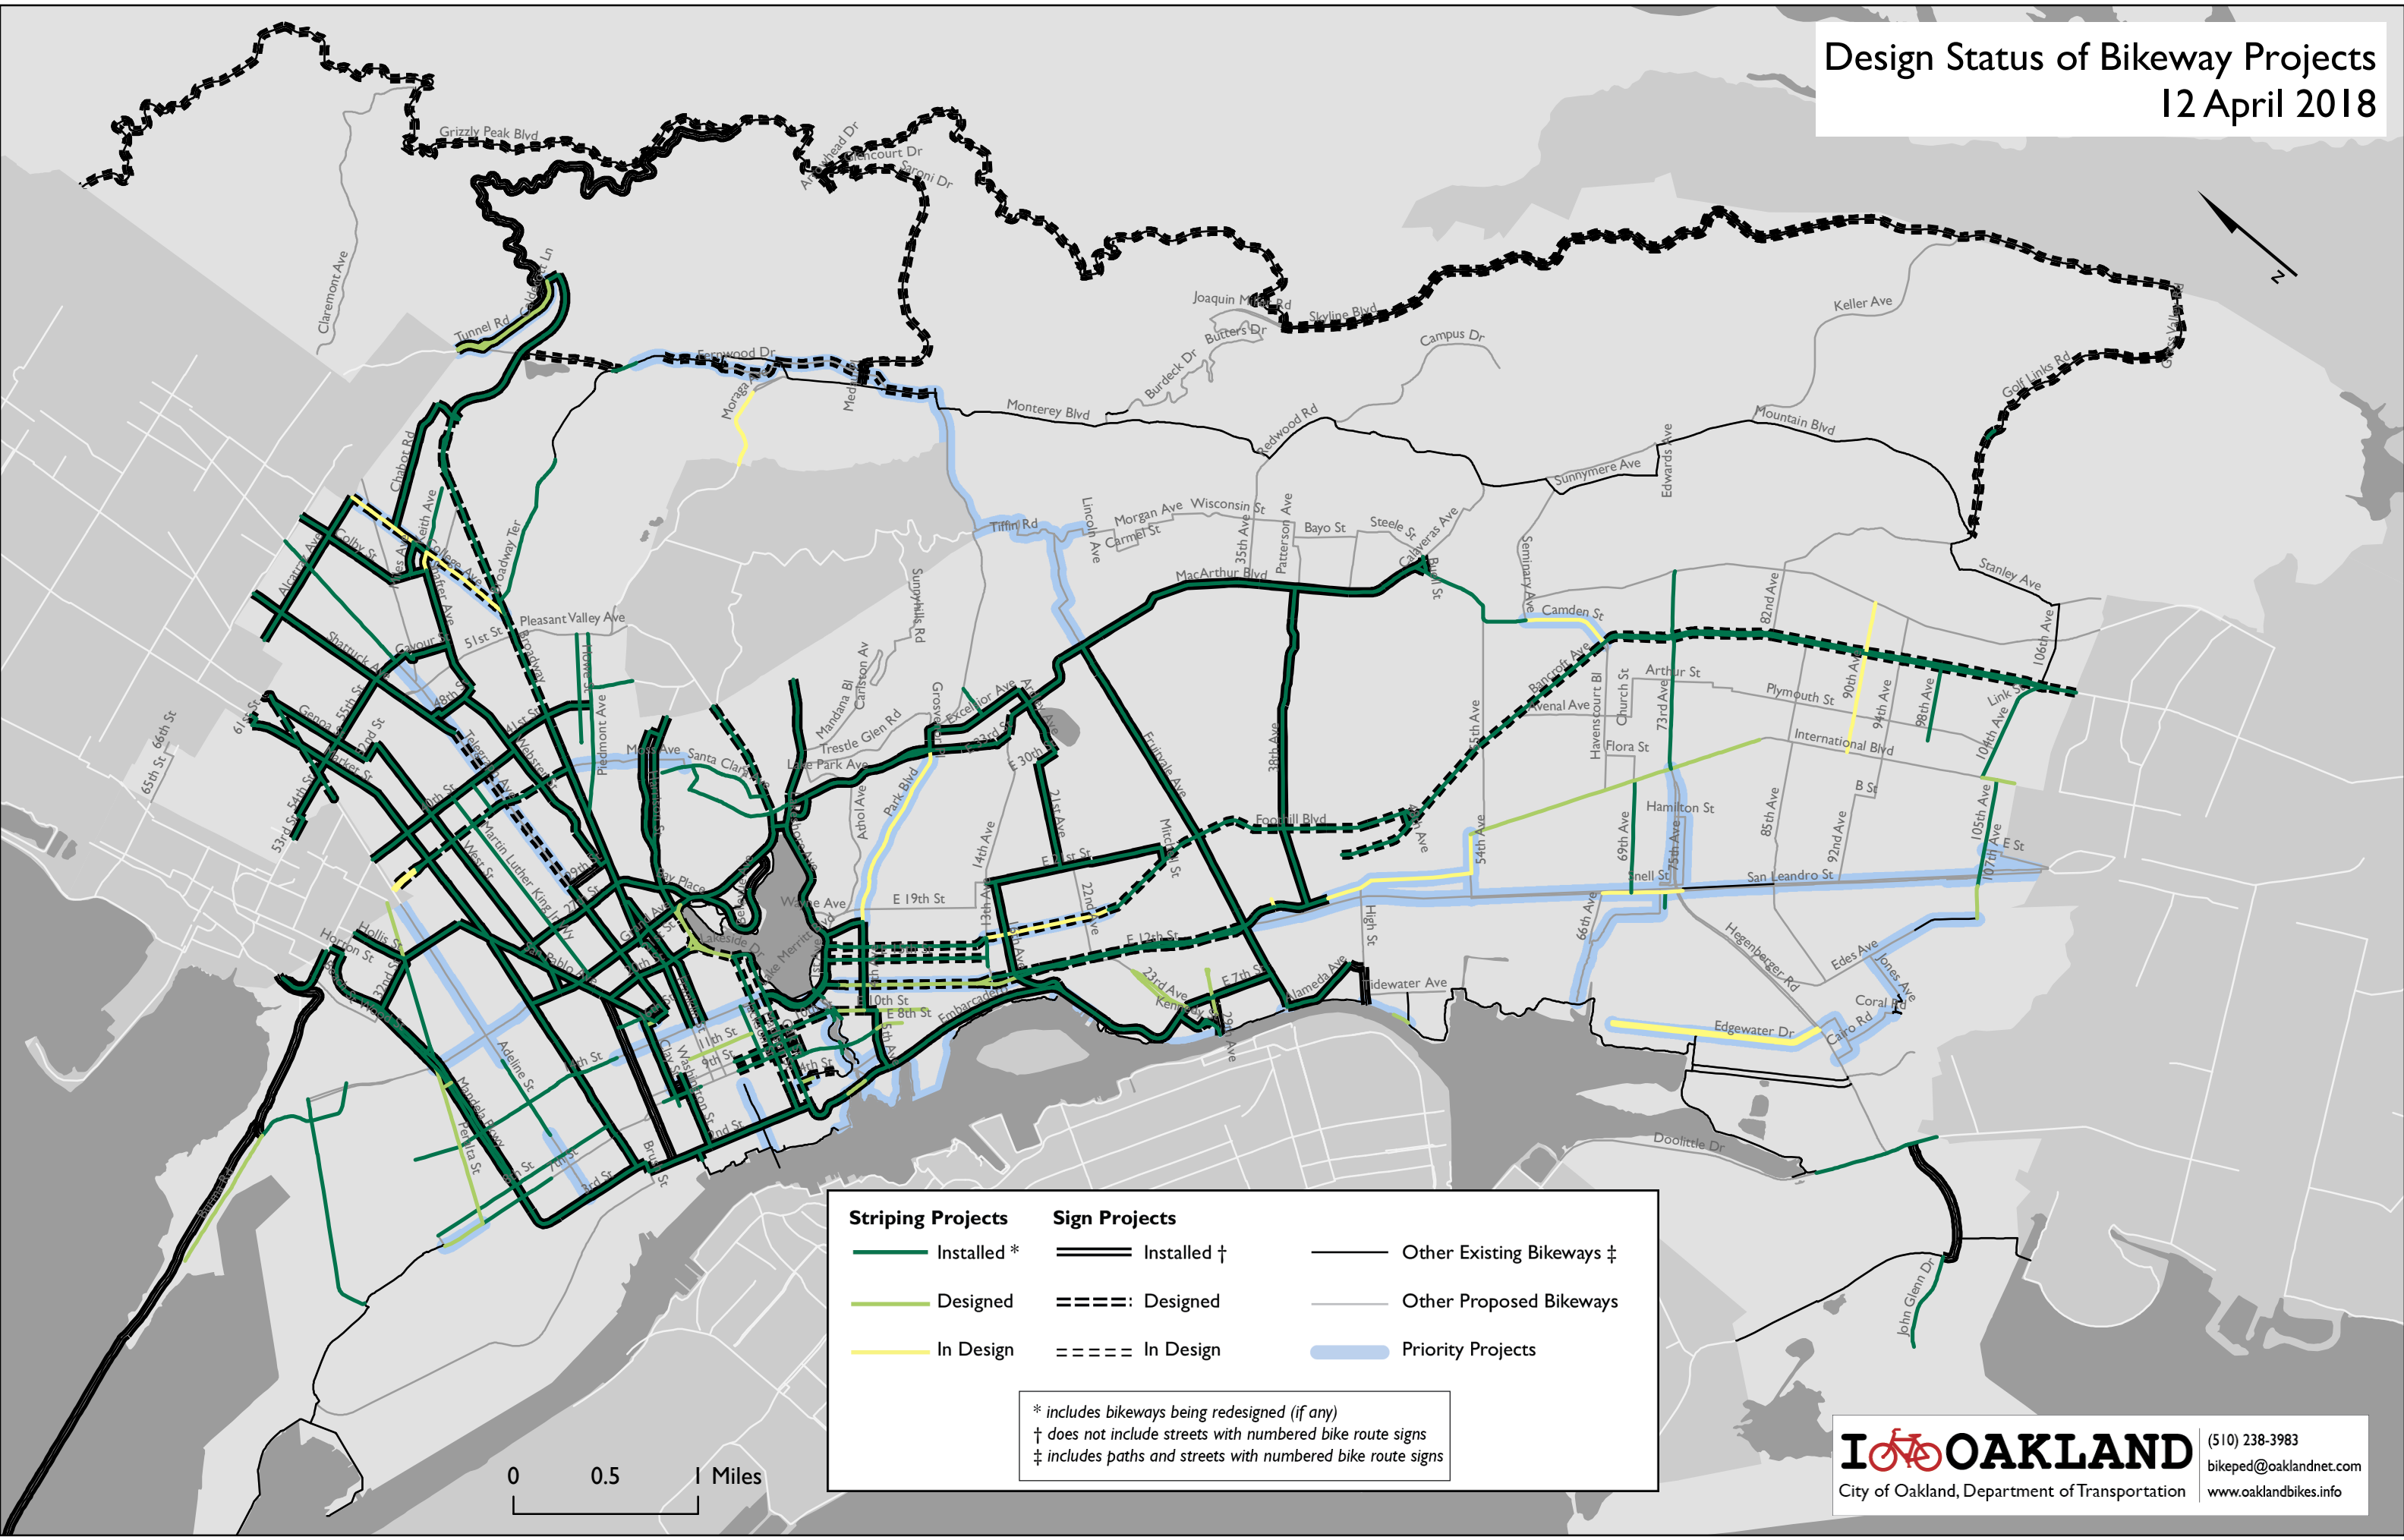

Striping Projects	Sign Projects	Other Existing Bikeways ‡
Installed *	Installed †	Other Existing Bikeways ‡
Designed	Designed	Other Proposed Bikeways
In Design	In Design	Priority Projects

* includes bikeways being redesigned (if any)
 † does not include streets with numbered bike route signs
 ‡ includes paths and streets with numbered bike route signs

City of Oakland, Bikeway Striping Projects Status

Street	From	To	Length (CL mi)	Bikeway Type	Project Type *	Design (% Complete)	Paving	Implementation	Organization
10th St	Madison St	9th Ave	0.9	bike lanes	new	100%	none	2018	DOT-Safe Streets, Bike/Ped
16th St	San Pablo Ave	Clay St	0.1	bike lanes	new	100%	none	2018	DOT-Safe Streets, Bike/Ped
Jackson St/Madison St/Oak St	7th St	9th St	0.3	protected bike lanes	spot	100%	none	2018	DOT-Great Streets, Vision Zero
Market St	Adeline St	45th St	0.5	bike lanes	redesign	100%	none	2018	DOT-Great Streets
Peralta St	32nd St	36th St	0.3	bike lanes	new	100%	none	2018	DOT-Great Streets
105th Ave	Edes Ave	Pippin St	0.2	sharrows	new	100%	overlay	2018	DOT-Safe Streets, Bike/Ped
4th St	Oak St	Fallon St	0.1	bike lanes	new	100%	overlay	2018	DOT-Great Streets, Paving
E 8th St	5th Ave	7th Ave	0.1	bike lanes	new	100%	overlay	2018	DOT-Great Streets, Paving
Fruitvale Av	Montana St	MacArthur Blvd	0.1	bike lanes	redesign	100%	overlay	2018	DOT-Great Streets, Paving
Moraga Ave	Estates Dr	Maxwelton	0.5	bike lanes	new	100%	overlay	2018	DOT-Great Streets, Paving
Piedmont Ave	Randwick Ave	MacArthur Blvd	0.2	bike lanes	redesign	100%	overlay	2018	DOT-Great Streets, Paving
2nd St	Brush St	Jefferson St	0.2	bike lanes	redesign	100%	preventative	2018	DOT-Great Streets, Paving
73rd Ave	San Leandro St	Amtrak	0.1	bike lanes	redesign	100%	preventative	2018	DOT-Great Streets, Paving
73rd Ave	San Leandro St	Amtrak	0.1	bike lanes	redesign	100%	preventative	2018	DOT-Great Streets, Paving
Clay St	Water St	2nd St	0.1	bike lanes	re/new	100%	preventative	2018	DOT-Great Streets, Paving
Market St	18th St	W Grand Ave	0.2	bike path	redesign	100%	preventative	2018	DOT-Great Streets, Paving
Peralta St	7th St	Mandela Pkwy	0.9	bike lanes	new	100%	preventative	2018	DOT-Great Streets
W MacArthur Blvd	Martin Luther King Jr Wy	Manila Ave	0.5	buffered bike lanes	restripe	100%	preventative	2018	DOT-Great Streets, Paving
Market St	W Grand Ave	Berkeley border	2.2	bike lanes	restripe	100%	various	2018	DOT-Great Streets, Paving
23rd Ave	E 7th St	E 11th St	0.6	bike lanes	new	100%	yes	2018	Caltrans
7th St	Wood St	Peralta St	0.2	bike lanes	new	100%	yes	2018	DOT-Great Streets
Harrison St/Lakeside Dr	19th St	Grand Ave	0.7	mixed	new	100%	yes	2018	OPW
West Burma Rd	Bay Bridge Path	Bay Bridge Path	0.8	bike lanes	new	100%	yes	2018	Port of Oakland
Tunnel Rd/Caldecott Ln	Berkeley	Kay Overcrossing	0.7	bike lanes	redesign	100%	none	2019	DOT-Great Streets
11th St	Broadway	Jackson St	0.4	bike lanes	new	100%	overlay	2019	AC Transit
E 12th St	2nd Ave	14th Ave (WB) / 16th Ave (EB)	1.1	bike lanes	new	100%	overlay	2019	AC Transit
Edgewater Dr	North End	Hegenberger Rd	2.4	bike lanes	new	100%	overlay	2019	DOT-Great Streets, Paving
International Blvd	54th Ave	85th Ave	1.8	bike lanes	new	100%	overlay	2019	AC Transit
Embarcadero	JLAC Driveway	5th Ave	0.3	bike lanes	new	100%	partial	2019	DOT-Great Streets
San Pablo Ave	16th St	17th St	0.1	bike lanes	redesign	100%	yes	2019	OPW
Washington St	7th St	9th St	0.1	bike lanes	redesign	100%	yes	2019	DOT-Great Streets
College Ave/Shafter Ave	Alcatraz Ave/Forest St	Broadway/College Ave	1.1	bike lanes/sharrows	new	95%	none	2018	DOT-Great Streets
38th Ave	Foothill Blvd	Brookdale Ave	0.7	buffered bike lanes	redesign	90%	none	2018	DOT-Safe Streets, Bike/Ped

City of Oakland, Bikeway Striping Projects Status

Street	From	To	Length (CL mi)	Bikeway Type	Project Type *	Design (% Complete)	Paving	Implementation	Organization
MacArthur Blvd	Coolidge Ave	35th Ave	0.6	buffered bike lanes	redesign	90%	none	2018	DOT-Safe Streets, Bike/Ped
Claremont Ave	Telegraph Ave	Clifton St	0.3	bike lanes	new	90%	none		DOT-Safe Streets
Market St	W Grand Ave	City Limit	2.2	bike lanes/sharrows	redesign	90%	overlay	2018	DOT-Great Streets, Paving
Shafter Ave	Forest St	51st St	0.5	bike blvd	redesign	90%	overlay	2018	DOT-Great Streets, Paving
Webster St	34th St	36th St	0.1	buffered bike lanes/sharrows	redesign	90%	overlay	2018	DOT-Great Streets, Paving
Embarcadero/E 7th St	10th Ave	Kennedy St	1.4	buffered bike lanes	redesign	90%	partial	2018	Port/DOT-Safe Streets
55th St	Adeline St	Shattuck Ave	0.6	buffered bike lanes	redesign	65%	none	tbd	DOT-Safe Streets, Bike/Ped
E 18th St	Lakeshore Ave	Park Blvd	0.2	bike lanes	redesign	65%	none	tbd	DOT-Safe Streets, Bike/Ped
Horton St	40th St	Mandela Pkwy	0.1	buffered bike lanes	redesign	65%	none	tbd	DOT-Safe Streets, Bike/Ped
San Leandro St	66th Ave	75th Ave	0.4	bike lanes	new	65%	none	tbd	DOT-Safe Streets, Bike/Ped
W Grand Ave	San Pablo Ave	Telegraph Ave	0.3	bike lanes	restripe	65%	none	tbd	DOT-Safe Streets
Park Blvd	E 18th St	MacArthur Blvd	1.1	buffered bike lanes	new	65%	overlay	tbd	DOT-Safe Streets, Bike/Ped
Camden St	Seminary Ave	Bancroft Ave	0.5	bike lanes	new	65%	tbd	tbd	DOT-Safe Streets, Bike/Ped
Mandela Pkwy	Horton St	7th St	3.0	buffered bike lanes	redesign	65%	tbd	tbd	DOT-Safe Streets, Bike/Ped
90th Ave	International Blvd	MacArthur Blvd	0.8	bike lanes	new	65%	yes	tbd	DOT-Safe Streets, Bike/Ped
Bancroft Ave	48th Ave	Durant Ave	6.5	buffered bike lanes	redesign	65%	yes	tbd	DOT-Great Streets, Paving
Market St	3rd St	7th St	0.2	buffered bike lanes	redesign	65%	yes	tbd	DOT-Safe Streets
Foothill Blvd	14th Ave	23rd Ave	0.7	bike lanes	new	35%	yes	tbd	DOT-Great Streets
Foothill Blvd	8th Ave	14th Ave	0.4	buffered bike lanes	redesign	15%	none	2019	DOT-Great Streets, Vision Zero
W MacArthur Blvd	San Pablo Ave	W MacArthur Underpass	0.6	bike lanes	new	15%	none	tbd	DOT-Safe Streets, Bike/Ped
69th Ave	International Blvd	San Leandro St	0.6	bike blvd	redesign	15%	overlay	tbd	DOT-Great Streets, Vision Zero
E 12th St/54th Ave	39th Ave	International Blvd	1.1	mixed	new	15%	partial	tbd	DOT-Great Streets
E 15th St	1st Ave	14th Ave	0.9	buffered bike lanes	redesign	15%	preventative	2019	DOT-Great Streets, Vision Zero

Design Completed (100%): 16.8 roadway miles
Design in Progress (15% - 95%): 25.0 roadway miles
Design Completion: 41.8 roadway miles

- 100% Plans packaged for construction
- 90% Review (field, internal, external)
- 65% Markings and details
- 35% Lane configuration
- 15% Project set-up (limits, viewports, street widths)

* Project Type: (a) "redesign" will appear on accompanying map as "Installed;" (b) "spot" doesn't appear on accompanying map.

City of Oakland, Bikeway Signage Projects Status

Corridor	From	To	Length (CL mi)	Design (% Complete)	Implementation
Broadway/Broadway Ter	41st St	Clarewood Dr	2.7	100%	2018
E 12th St-West	1st Ave	Fruitvale Ave	3.8	100%	2018
W MacArthur Blvd	San Pablo Ave	Broadway	1.5	100%	2018
Adeline St-North	47th St	61st St	0.6	100%	
Grand Ave-East	El Embarcadero	Jean St	0.7	100%	
College Ave	Broadway	Alcatraz Ave	0.8	90%	2018
Madison St/Oak St	2nd St	19th St	2.5	90%	2018
Lake Merritt BART	5th Ave	Harrison St	1.9	90%	2018
Foothill Blvd/Bancroft Ave	Lakeshore Ave	San Leandro	11.4	55%	2018
Telegraph Ave-Central	29th St	41st St	0.8	55%	
Grizzly Peak Blvd/Skyline Blvd	Berkeley	Mountain Blvd	21.8	35%	
Harrison St/Lakeside Dr	19th St	Grand Ave	0.4	15%	
Piedmont Ave/Linda Ave	Broadway	Grand Ave	1.2	15%	
Mountain Blvd/Shepherd Canyon	Broadway	Skyline Blvd	4.7	15%	
MacArthur Blvd/Camden St	Buell St	Bancroft Ave	1.2	0%	
Peralta St	7th St	36th St	1.9	0%	

Design Completed (100%): 9.4 roadway miles
Design in Progress (> 0%): 48.4 roadway miles
Total (> 0%): 51.3 roadway miles

Design Status Work Completed

100%	Final work order
90%	Final project map and installation locations
75%	Field verification
55%	Revised project map and field review sheet
35%	Preliminary project map (sign locations, sign messages)
15%	Overview map (project boundaries, supported destinations)
0%	Assigned to staff